
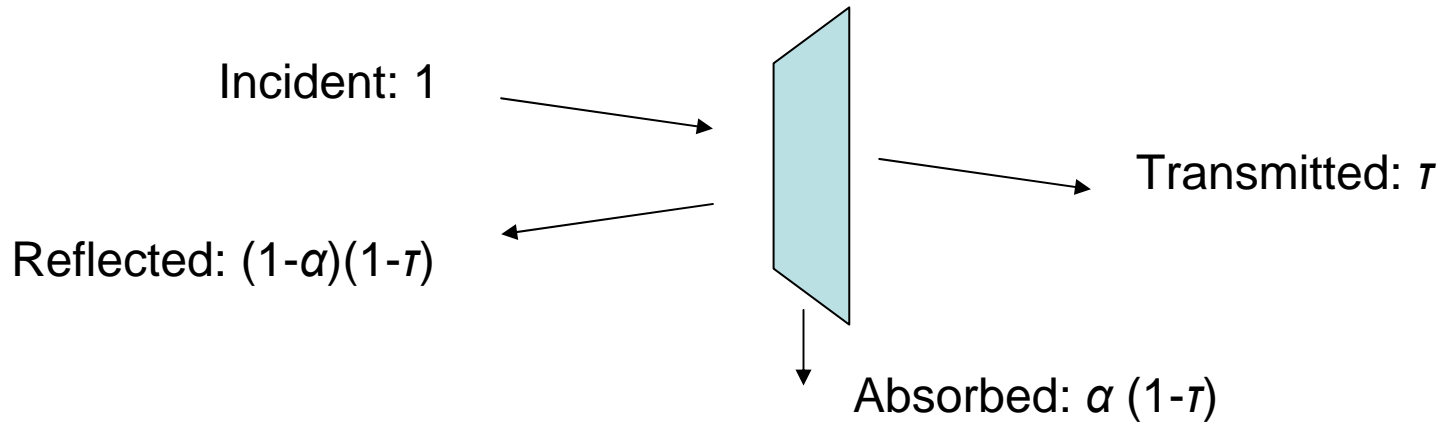


ODEON

Auralization of sound transmission


Jens Holger Rindel
2005-04-27

Transparency in ODEON

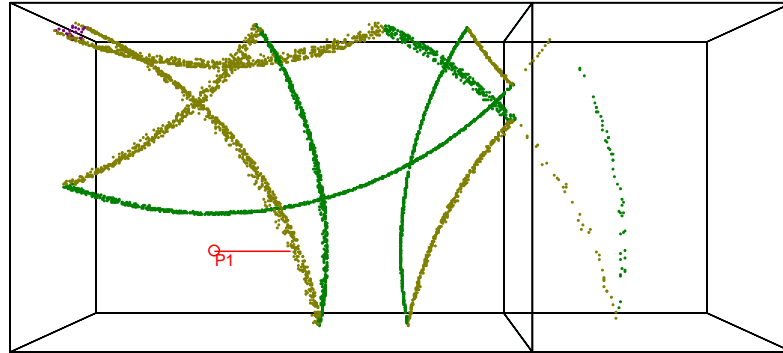

Apparent absorption (seen from source room): $\tau + \alpha (1-\tau) = \underline{\alpha + \tau (1-\alpha)}$

Sound transmission

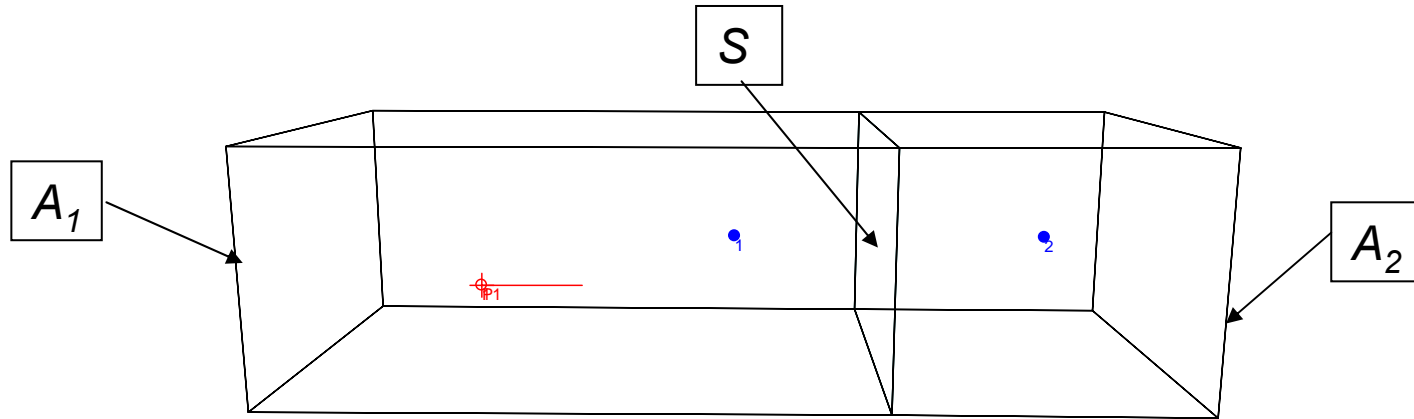

Source, sound power level: L_W

$$L_1 = L_W + 10 \log \frac{4}{A_1}$$

Receiver 1 and 2: sound pressure level, L_1 and L_2

$$R = L_1 - L_2 + 10 \log \frac{S}{A_2}$$

$$L_2 = L_W - R + 10 \log \frac{4S}{A_1 A_2}$$

Auralization in the receiving room

The frequency dependent insulation of the wall can be simulated by a frequency dependent attenuation of the source sound power


A transparency of $\tau = 0.1$ is equivalent to
10 dB sound reduction index, or
10 dB reduced sound power level of the source

This means a small increase of the sound absorption in the two rooms (less than 0.1 for the transmitting surface, which is normally not significant)


Simulated measurement in ODEON

	S=	10	m2	V2 =	30	m3		
Frequency	63	125	250	500	1000	2000	4000	8000
L1	72,4	72,4	72,4	71	69,5	68,8	68,3	67,5
L2	62,8	57,8	52,8	46,1	41,5	48,8	40,2	30,6
T2	0,49	0,49	0,49	0,41	0,38	0,38	0,36	0,31
Area correction	0,1	0,1	0,1	-0,7	-1,0	-1,0	-1,2	-1,9
R(calculated)	9,7	14,7	19,7	24,2	27,0	19,0	26,9	35,0
R	10	15	20	25	28	20	28	36
Deviation	0,3	0,3	0,3	0,8	1,0	1,0	1,1	1,0


Simulated measurement in ODEON

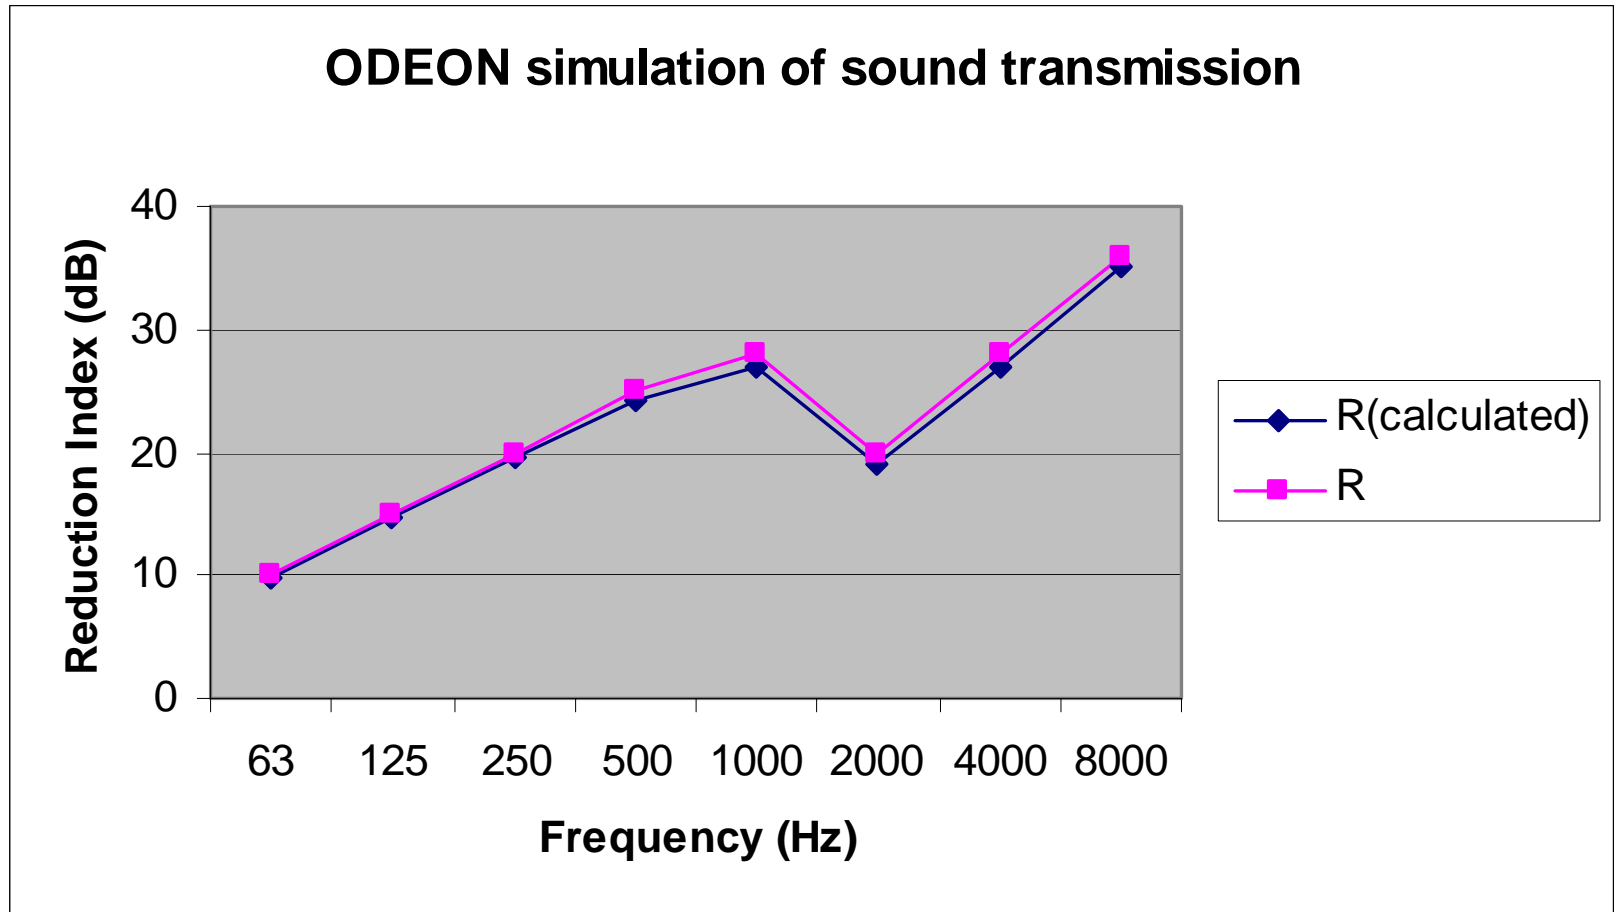

Examples

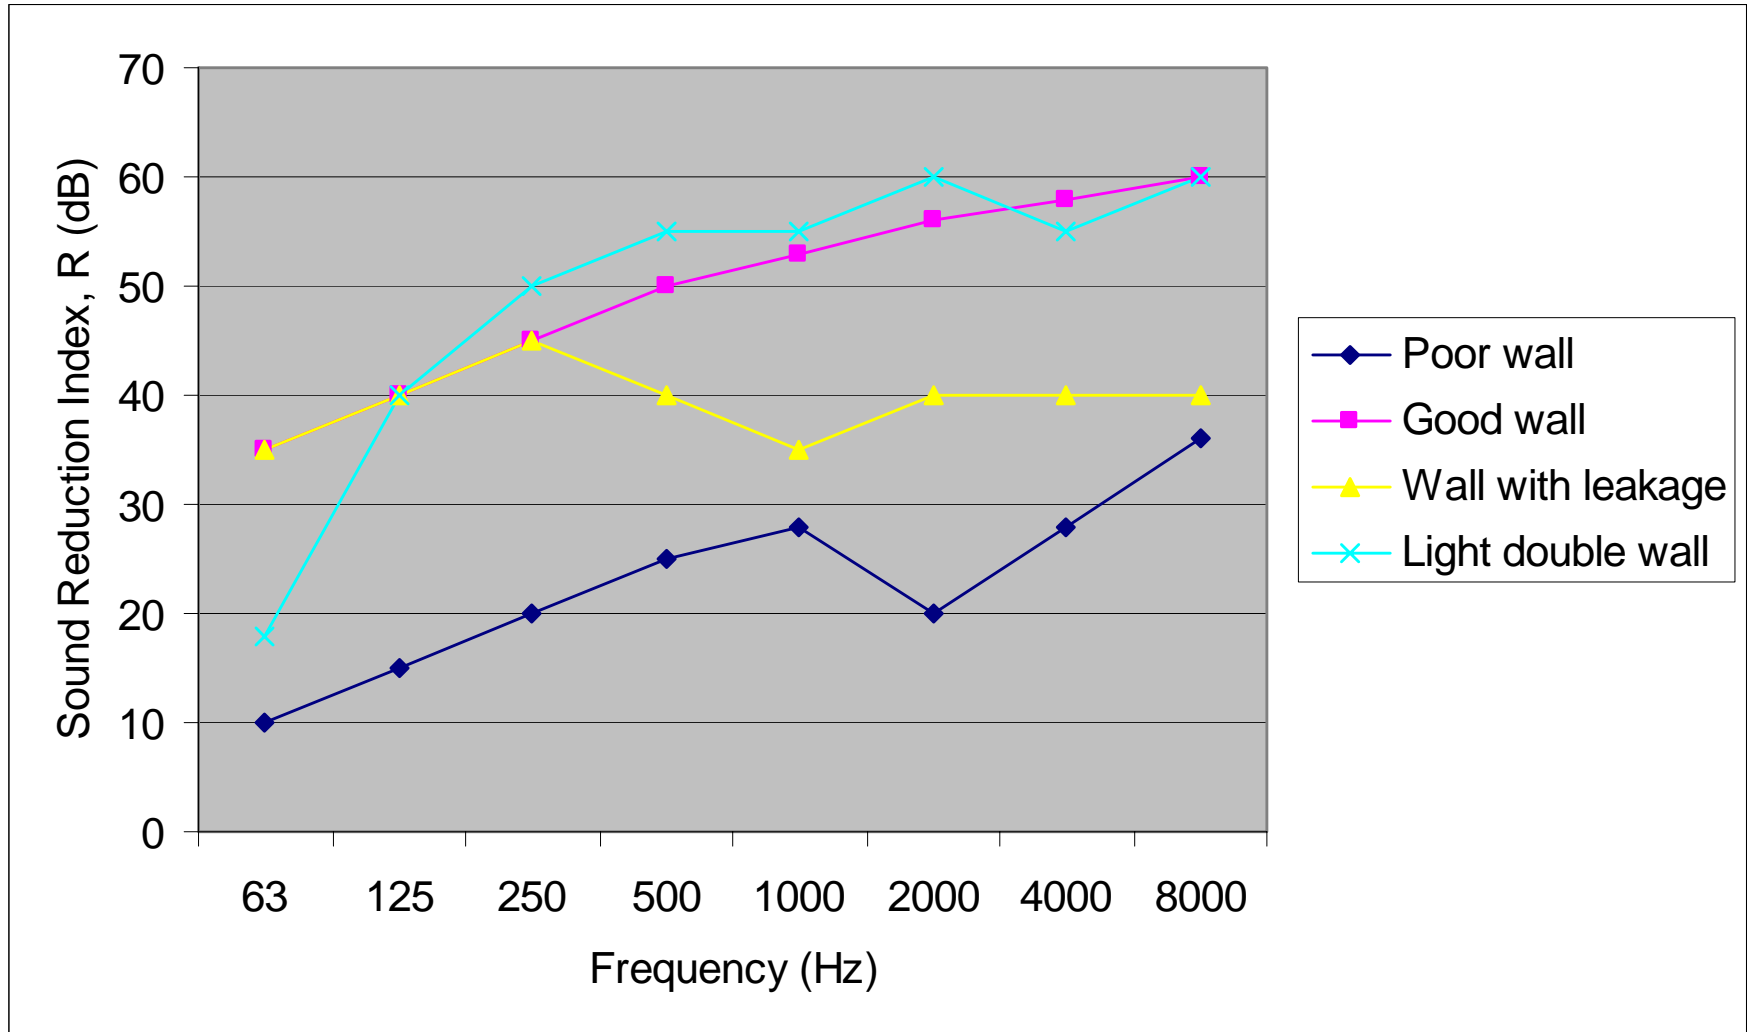

Freely suspended surface

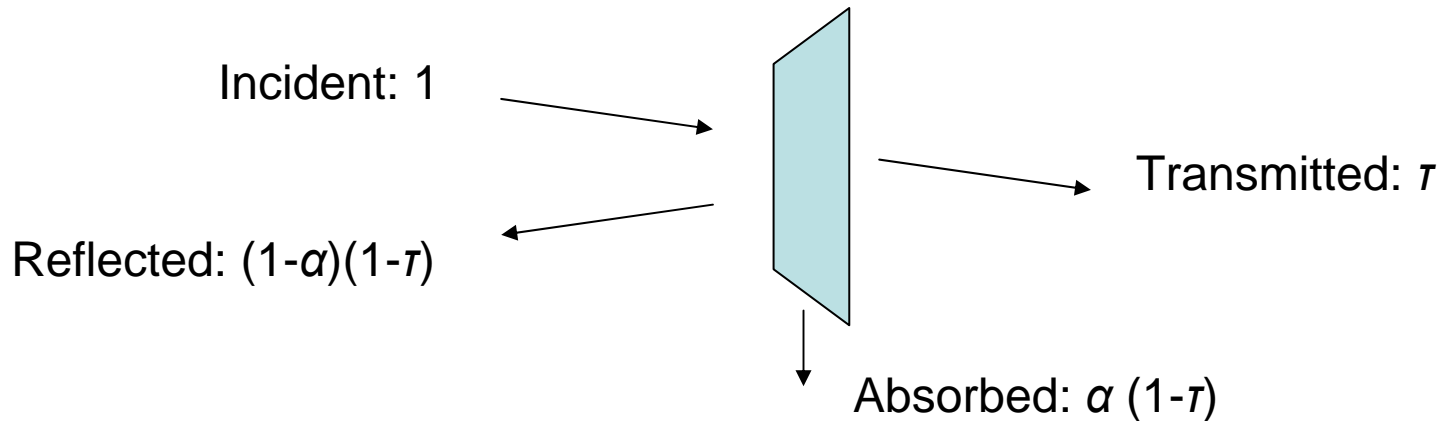

Transmitted sound remains in the room

Sound is incident from both sides

Apparent absorption : $2\alpha(1-\tau)$

If α is measured in lab. e.g. 20 cm in front of a wall,
the absorption of freely suspended material can be modelled
using the same α and $\tau = 0.4 - 0.6$ depending on the density